




kit includes : bungee pole, top rail, base unit & carry case



Lean the unit backwards and extend the graphic by pulling up the top rail until the complete image is visible

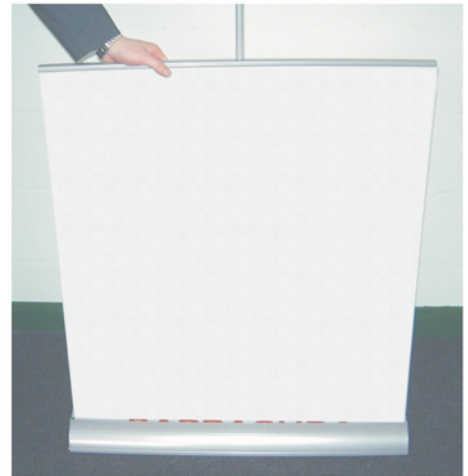

Remove the three part bungee pole from the base unit
Construct the bungee pole and slot into the base unit



Finally secure the graphic into position by locating the top rail hole with the bungee pole

Take care when lowering banner (do not drop) to prevent damage to graphics

Technical Specification

Visible graphic area : 2200mm (H) x 600mm to 1000mm (W)
depending upon the version supplied

Note : Add 200mm to graphic length to allow for the roller
Unit weight : 5kg approx

Guidelines for Graphic substrates

- 1, Material thickness must be between 225 and 300 microns in total
- 2, The substrate must be pliable and suitable for roller bannerstands
- 3, After fitting, the graphic should be left for 24 hours before use to ensure the adhesive bonds sufficiently